


A modern office interior featuring a large glass-walled meeting room. The room has a dark carpet, a light-colored sofa, and a wooden wall panel. In the foreground, there are two bright yellow chairs. The ceiling is white with recessed lighting. The overall atmosphere is clean and professional.

SYSTEM REFLEKSOL

REFLEKSOL 125


Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	3.50 m
Maximum height	4.25 m
External use	yes
Internal use	no

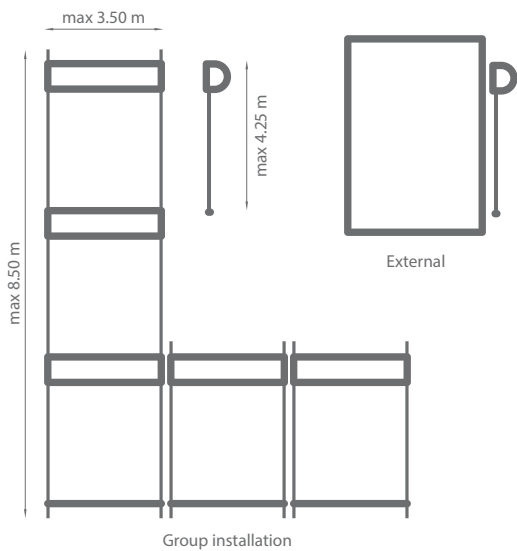

Standard construction colours:



Colours from SELT palette
pages: 152-153

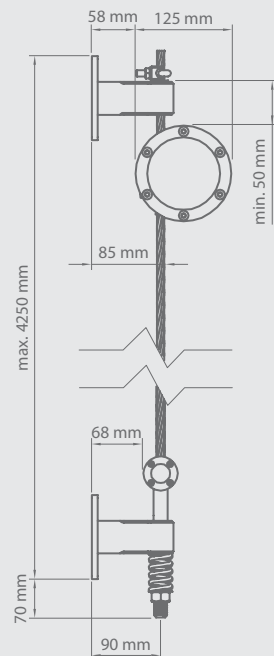



Properties:

- *Cassette made of round-shaped extruded aluminium*
- *Cable guides made of stainless steel 10 mm diameter*
- *Wide range of fabrics*
- *Access to revision from the front of the system*
- *Electric drive*
- *Dedicated for facade installation*
- *Option to create modules vertically (up to 8.5 m) and horizontally*
- *Construction available in any colour from RAL palette (optional)*


REFLEKSOL 120 ZIIP

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	4 m
Maximum height	4 m
External use	yes
Internal use	no


Standard construction colours:



Colours from SELT palette
pages: 152-153




External

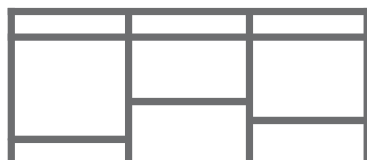

Group installation



Cassette dimensions

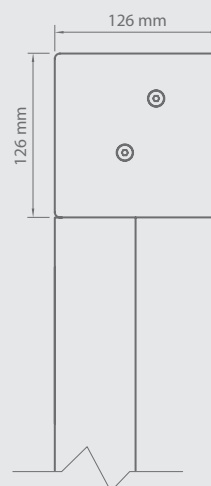



Properties:

- *Wind resistance class 6*
- *Extruded aluminium cassette dedicated for niche and facade installation*
- *ZiiiP mechanism*
- *Two-piece guide rail with compensating gaskets*
- *Option to create modules using modular brackets*
- *Self-supporting system*
- *Electric drive*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL

120 ZIIP


FOR CONCEALED INSTALLATION

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	4 m
Maximum height	4 m
External use	yes
Internal use	no


Standard construction colours:



Colours from SELT palette
pages: 152-153




External

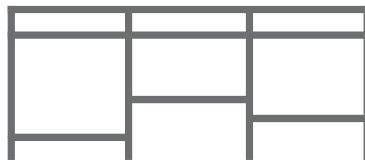

Group installation



Cassette dimensions

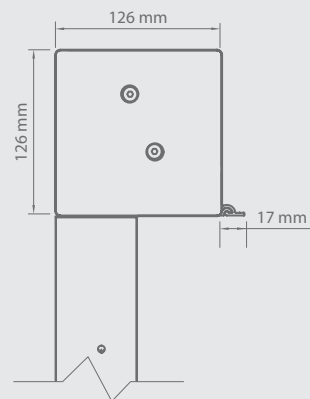



Properties:

- *Wind resistance class 6*
- *Cassette for under plaster installation made from aluminium sheet, equipped with an extension enabling external plaster application*
- *ZiiiP mechanism*
- *Revision from the bottom of the cassette*
- *Option to create modules using modular brackets*
- *Two-piece guide rail with compensating gaskets*
- *Electric drive*
- *Self-supporting system*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL


120 ZIIP LARGE

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	min 4 m max 5 m
Maximum height	3 m
External use	yes
Internal use	no


Standard construction colours:



Colours from SELT palette
pages: 152-153

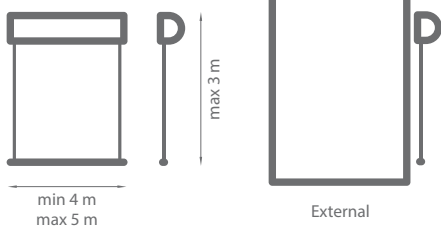

Cassette dimensions

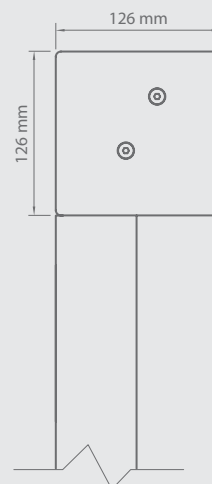



Properties:

- *Width of the system from 4 m to 5 m*
- *Extruded aluminium cassette dedicated for niche and facade installation*
- *ZiiiP mechanism*
- *Revision from the front of the cassette*
- *Two-piece guide rail with compensating gaskets*
- *Option to create modules using modular brackets*
- *Electric drive*
- *Construction available in any colour from RAL palette (optional)*
- *System is compatible with Pergola*

REFLEKSOL

120 ZIIP LARGE


FOR CONCEALED INSTALLATION

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	min 4 m max 5 m
Maximum height	3 m
External use	yes
Internal use	no

Standard construction colours:



Colours from SELT palette
pages: 152-153



min 4 m
max 5 m




max 3 m



External



Cassette dimensions

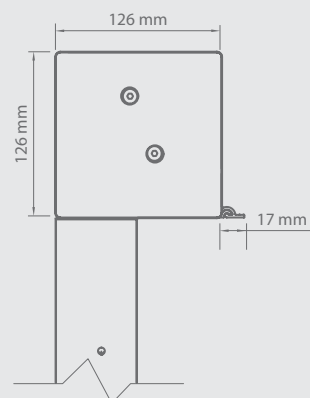




Properties:

- *Width of the system from 4 m to 5 m*
- *Wind resistance class 6*
- *The cassette for concealed installation made of extruded aluminium is equipped with an extension enabling external plaster application*
- *ZiiiP mechanism*
- *Revision from the bottom of the cassette*
- *Two-piece guide rail with compensating gaskets*
- *Option to create modules using modular brackets*
- *Electric drive*
- *Self supporting system*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL ZIMP BOX

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	4 m
Maximum height	4 m
External use	yes
Internal use	no

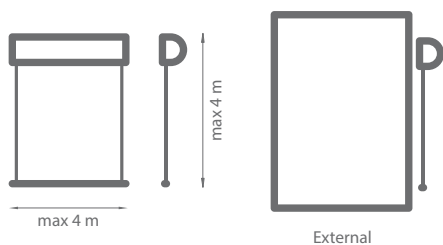


Standard construction colours:



Colours from SELT palette
pages: 152-153



Cassette dimensions

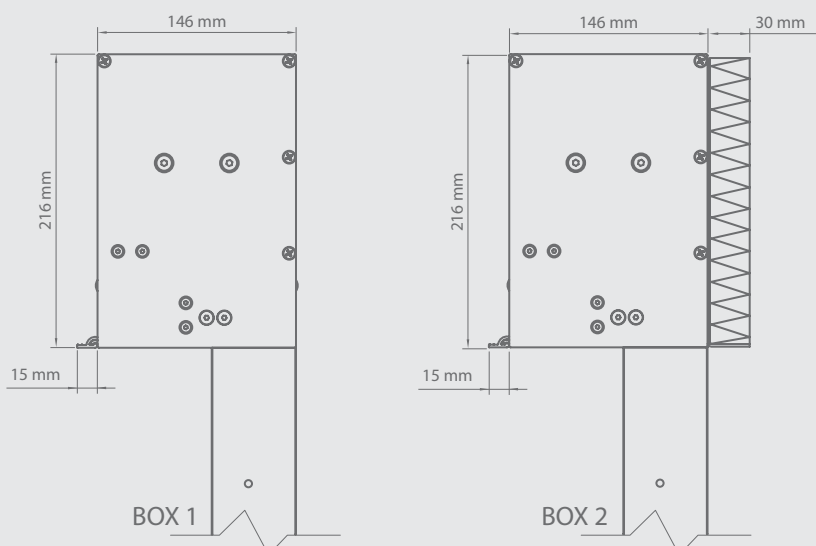



Properties:

- *Wind resistance class 6*
- *Cassette for under plaster installation made from extruded aluminium, equipped with an extension enabling external plaster application*
- *ZiiiP mechanism*
- *Two revision lids enabling easy access and installation*
- *Two-piece guide rail with compensating gaskets system*
- *Bottom bar concealed in the cassette*
- *Box 2 with windowhead insulation*
- *Wide range of fabrics*
- *Electric drive*
- *Available self-supporting version where the cassette rests on guide rails*
- *Construction painted in any RAL colour (optional)*



REFLEKSOL 95 ZIIP

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	2.7 m
Maximum height	3.0 m
External use	yes
Internal use	no


Standard construction colours:



Colours from SELT palette
pages: 152-153




External

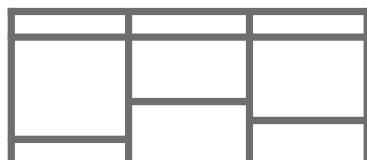

Group installation



Cassette dimensions

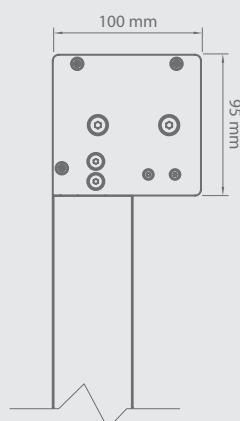



Properties:

- *Wind resistance class 6*
- *Cassette for niche or wall installation made from extruded aluminium*
- *Ziip mechanism*
- *Revision from the front of the cassette*
- *Two-piece guide rail with compensating gaskets*
- *Electric drive*
- *Self-supporting system*
- *Construction available in any colour from RAL palette (optional)*
- *Option to create modules using modular brackets*



REFLEKSOL 120

Colour	RAL
Electric drive	yes
Manual drive	no
Extruded aluminium sideguides	
• maximum width	4.0 m
• maximum height	4.0 m
Cable guide	
• maximum width	3.5 m
• maximum height	3.0 m


Standard construction colours:



Colours from SELT palette
pages: 152-153




External

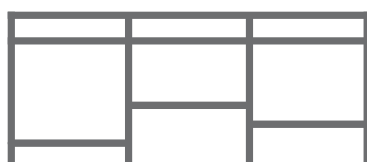

Group installation



Cassette dimensions

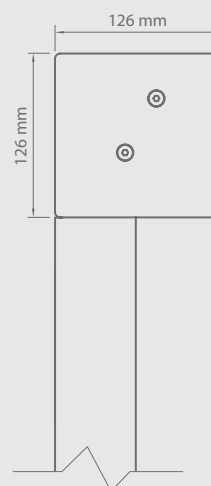



Properties:

- *Cassette for niche or facade installation made of extruded aluminum*
- *Rail guides made of extruded aluminum or cable guide made of stainless steel*
- *Revision from the front of the cassette*
- *Wide range of fabrics*
- *Electric drive*
- *Self-supporting option available*
- *Option to connect systems through common modular guide rail*
- *Construction available in any colour from RAL palette (optional)*
- *Anti-wind bars option available*

REFLEKSOL

120


FOR CONCEALED INSTALLATION

Colour	RAL
Electric drive	yes
Manual drive	no
Extruded aluminium sideguides	
• maximum width	4.0 m
• maximum height	4.0 m
Cable guide	
• maximum width	3.5 m
• maximum height	3.0 m

Standard construction colours:




Colours from SELT palette
pages: 152-153




max 4 m



max 4 m




External

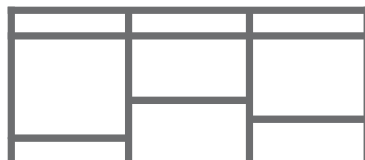

Group installation



Cassette dimensions

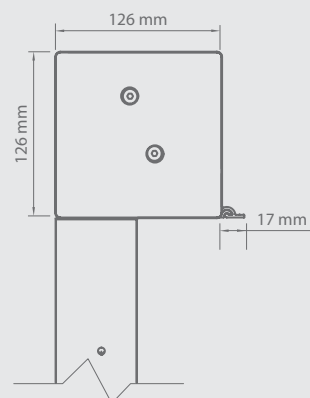



Properties:

- *Cassette dedicated for concealed installation made of aluminium sheet. The cassette has an extension that enables putting plaster on it*
- *Rail guides made of extruded aluminum or cable guide made of stainless steel*
- *Revision from the bottom of the cassette*
- *Electric drive*
- *Self-supporting option available*
- *Construction available in any colour from RAL palette (optional)*
- *Wide range of fabrics*
- *Option to connect systems through common modular guide rail*
- *Anti-wind bars option available*

REFLEKSOL 103


Colour	RAL
Electric drive	yes
Manual drive	yes
Extruded sideguides	
• maximum width	4.5 m
• maximum height	4.0 m
External use - cable guides	
• maximum width	3.5 m
• maximum height	3.0 m
Internal use - cable guides	
• maximum width	4.5 m
• maximum height	4.0 m




Standard construction colours:



Colours from SELT palette
pages: 152-153

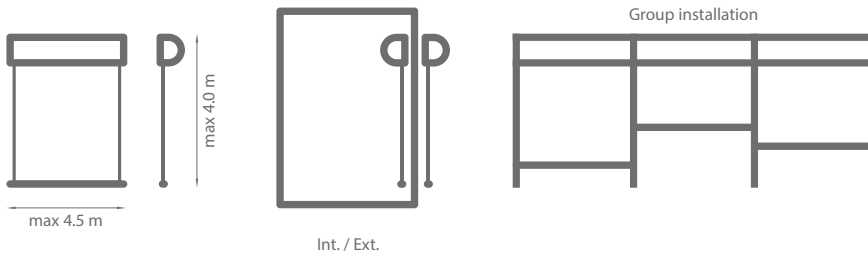

Cassette dimensions

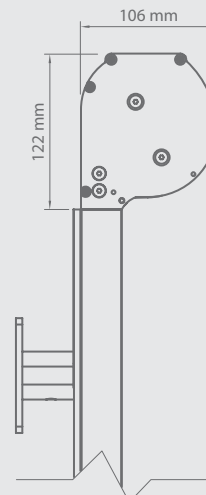




Properties:


- *Cassette made of extruded aluminium*
- *Revision from the front of the cassette*
- *Extruded aluminium sideguides or cable guides made of stainless steel*
- *Anti-wind bars option available*
- *Wide range of fabrics*
- *Manual or electric drive*
- *Dedicated for the wall, niche and facade installation*
- *Option to create modules using common guide rail and modular brackets*
- *Self-supporting option available*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL 95

Colour	RAL
Electric drive	yes
Manual drive	no
Maximum width	3.5 m
Maximum height	4.0 m
External use	yes
Internal use	yes

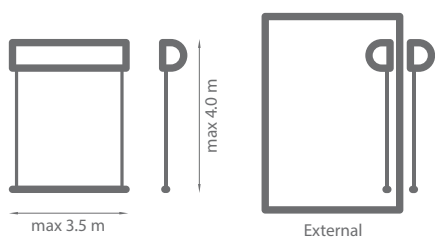

Group installation

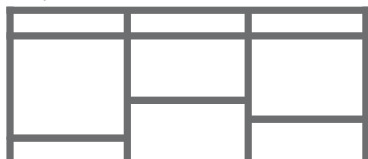


Standard construction colours:



Colours from SELT palette
pages: 152-153



Cassette dimensions

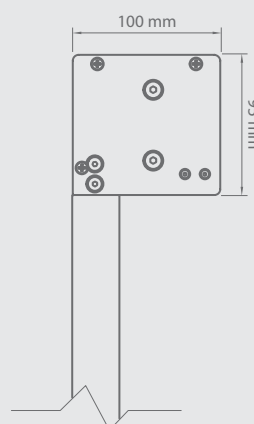




Properties:

- *Cassette for niche or wall installation made from extruded aluminium*
- *Extruded aluminium sideguides*
- *Revision from the front of the cassette*
- *Wide range of fabrics*
- *Electric drive*
- *Self-supporting system*
- *Option to connect systems through modular guide rail*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL 90

Colour	RAL
Electric drive	yes
Manual drive	yes
Use - extruded sideguides	
• maximum width	3 m
• maximum height	4 m
External use - cable guides	
• max. width and height	3 m
Internal use - cable guides	
• maximum width	3 m
• maximum height	4 m

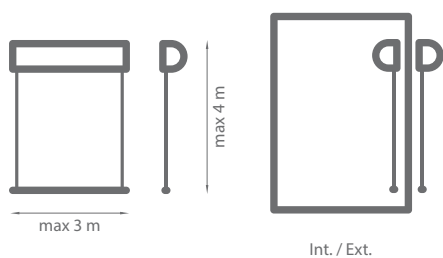


Standard construction colours:



Colours from SELT palette
pages: 152-153



Cassette dimensions

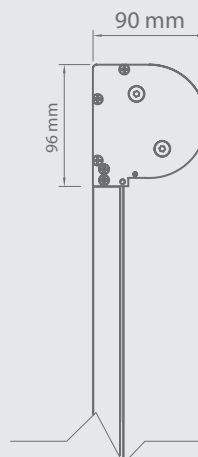




Properties:

- *Cassette made of extruded aluminium*
- *Revision available from the front of the cassette*
- *Extruded aluminium sideguides or cable guides from stainless steel*
- *Anti-wind bars option available*
- *Wide range of fabrics*
- *Manual or electric drive*
- *Dedicated for the wall, niche and facade installation*
- *Self-supporting option available*
- *Construction available in any colour from RAL palette (optional)*
- *Self-supported system only with G31 and G80 guide rails*

REFLEKSOL 76

Colour	RAL
Electric drive	yes
Manual drive	yes
Maximum width	2.6 m
Maximum height	2.6 m
External use	yes
Internal use	yes

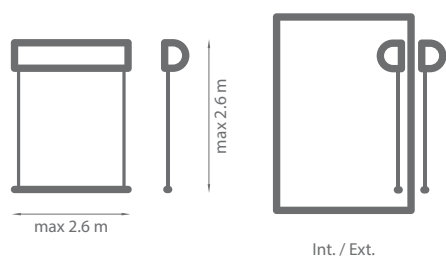


Standard construction colours:



Colours from SELT palette
pages: 152-153

Cassette dimensions

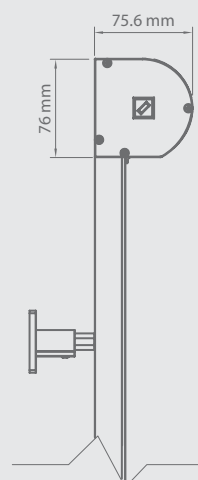




Properties:

- *Cassette made of extruded aluminium*
- *Plastic end caps*
- *Revision from the back of the cassette*
- *Extruded aluminium sideguides or cable guides from stainless steel*
- *Wide range of fabrics*
- *Manual or electric drive*
- *Dedicated to the wall, niche and facade installation*
- *Self-supporting option available*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL XXL

Colour	RAL
Electric drive	yes
Manual drive	yes
External use	yes
• max. width and height	3.0 m
Internal use	yes
• maximum width	4.5 m
• maximum height	5.0 m

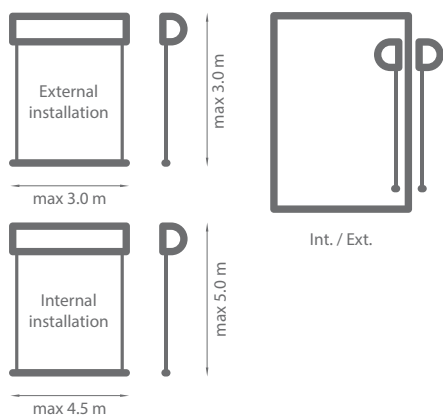


Standard construction colours:



Colours from SELT palette
pages: 152-153



Wall/ceiling bracket dimensions

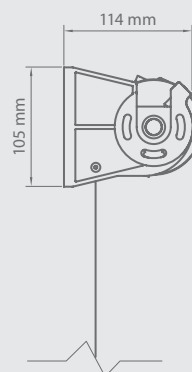




Properties:

- *System without cassette*
- *Cable guides made of stainless steel*
- *Free-hanging system available only in internal installation option*
- *Various bottom bars available*
- *Wide range of fabrics*
- *Manual or electric drive*
- *Wall or ceiling installation*
- *Construction available in any colour from RAL palette (optional)*

REFLEKSOL XL

Colour	RAL
Electric drive	yes
Manual drive	yes
Internal use	yes
• max. width and height	4 m
External use	yes
• max. width and height	3 m

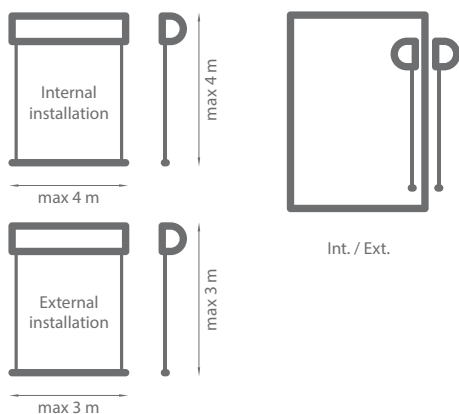


Standard construction colours:



Colours from SELT palette
pages: 152-153



Wall/ceiling bracket dimensions

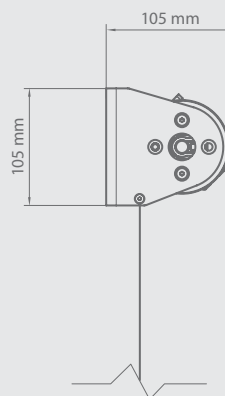




Properties:

- System without cassette
- Aluminium brackets
- Cable guides made of stainless steel
- Free-hanging system available only in internal installation option
- Various bottom bars available
- Wide range of fabrics
- Manual or electric drive
- Wall or ceiling installation
- Construction available in any colour from RAL palette (optional)

The image shows three rolls of screen fabric. The top roll is dark grey with a fine, dense mesh. The middle roll is a medium grey with a slightly larger, more pronounced mesh pattern. The bottom roll is white with a very fine, uniform mesh. The rolls are stacked and slightly curved, creating a sense of depth and texture. The lighting is soft, highlighting the intricate patterns of the fabrics.

SCREEN FABRICS

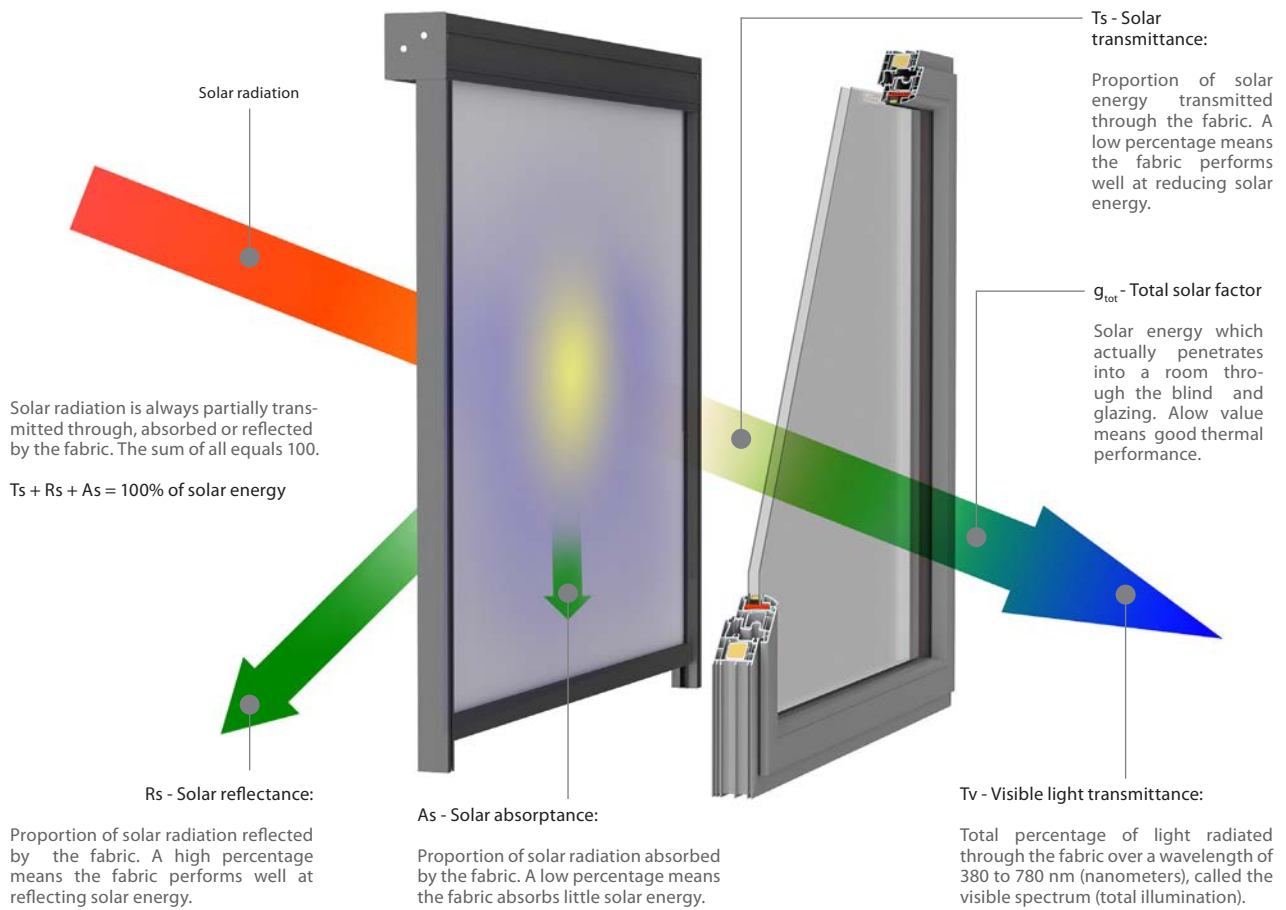

OPENNES FACTOR:

Relative area of the openings in the fabric. It is considered as independent of the colour. For fabric with the same weave, it should be measured using the darkest colour in the range.

SERGE 1 % / SERGE 600

Collection of fabrics made from fiberglass covered with PVC. Fabrics made of this group have a distinctive diagonal „serge” weave, which guarantees them an unusual dimensional stability. High fire resistance and very good technical parameters of fabrics provide users with visual comfort in rooms, thus protecting against overheating the interior.

POLYSCREEN

Wide group of technical polyester fabrics coated with PVC, characterized by variety of weaving patterns and properties (PS Luminous, PS 550, PS 350). This allows architects to select the right solution, increasing visual attractiveness of the building and to emphasize its individual character. High technical parameters provide optical and thermal comfort inside the room. An additional feature of the fabric is the ease to keep it clean.

BLACK OUT

High-end blackout fabrics (Serge 600 BO Lunar, Polyscreen 314 BO) effectively block sunlight coming into the room. It is ideal solution for conference rooms, audio-visual, photographic studios, etc. High dimensional stability, high technical parameters and interesting colours are without a doubt advantages of fabrics in this group.

SUNWORKER


Smooth polyester fabric finished with PVC. Unique structure of the fabric effectively stops the sunlight, allowing for just optimal amount of visible light to transmit inside the room, providing high comfort to its users. The advantages of this fabric are: color fastness, high resistance to weather conditions and easy to maintain clean.

SOLTIS 92 / SOLTIS 99

Polyester technical fabric coated with PVC, manufactured with patented technology Precontraint Ferrari®. The unique technology gives fabric high stability and protects it against deformations even in large size blinds. High technical parameters guarantee optical and thermal comfort. The quality components used in production of this fabric ensures color fastness. Thanks to the smooth surface, the fabric is difficult to absorb dirt or get stained.

ACOUSTIC - VEROGLIM

Elegant fabric, made from the highest quality non-flammable polyester fibers Trevira® CS, intended for indoor use. Because of its weight, the fabric is ideally suited for cassette systems. An important advantage of this fabric is high coefficient of acoustics. Thanks to its structure, the fabric absorbs sound and mutes the room. Another advantage is metallic surface that reflects bright light and in this way regulates its intensity in the room.

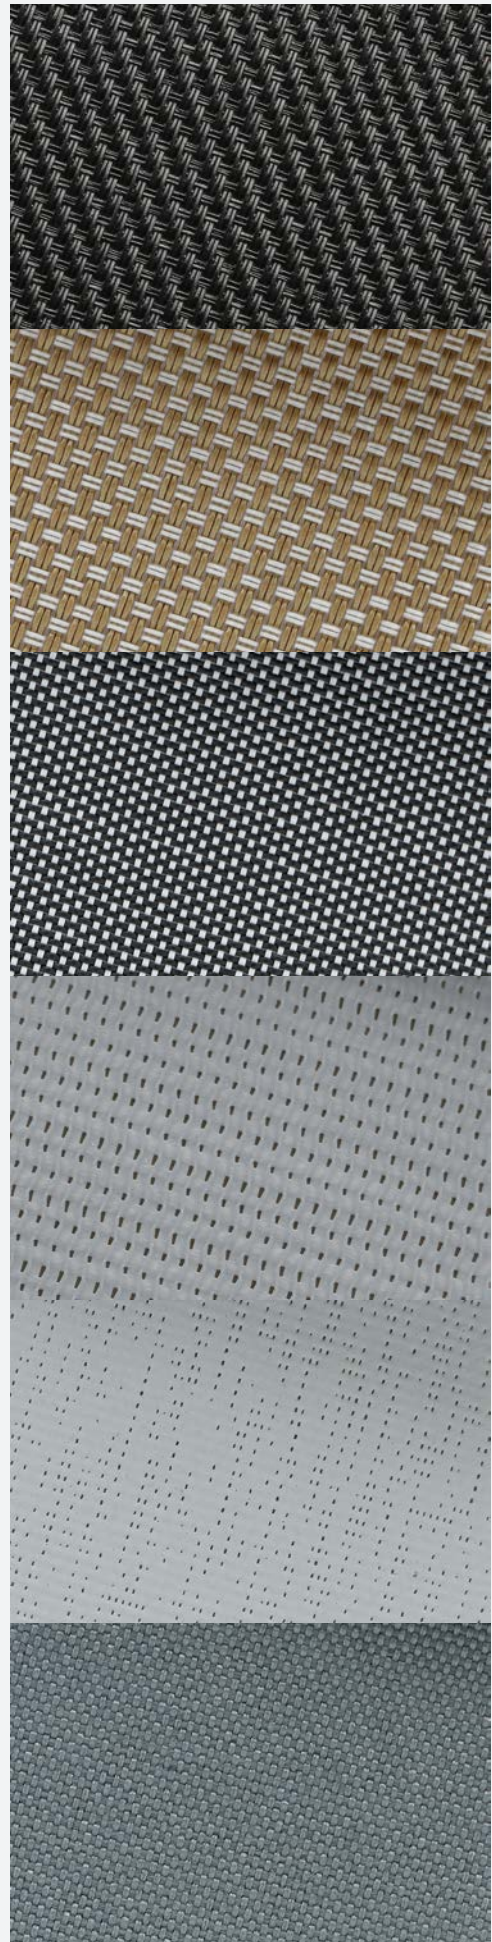

SERGE 600

WHITE - WHITE




60002002

GREY - WHITE




60001002

PEARL - GREY

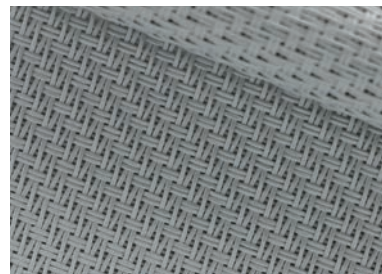

60007007

GREY - GREY

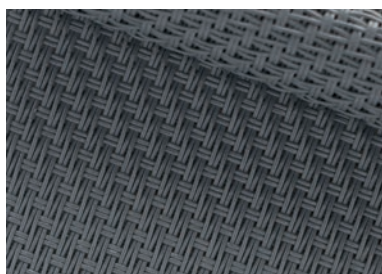


60001001

GREY - CHARCOAL




60001010

CHARCOAL - CHARCOAL

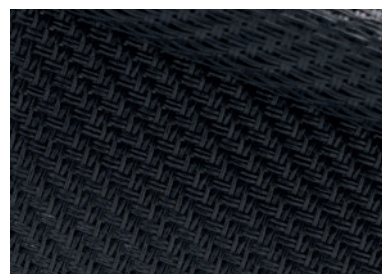

60010010


	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	42% glasfibre + 58% pvc	525	0.74	>7	5	21/21	65.9/66.3	13.2/12.7	21.2/21.2	interior / exterior
Grey - White						6.7/6.7	37.2/26.9	56.2/66.4	6.6/6.6	
Pearl - Grey						10.1/10.1	38.3/39.4	51.7/50.5	8.4/8.4	
Grey - Grey						3.5/3.5	15.1/15.1	81.3/81.4	3.6/3.6	
Grey - Charcoal						3.6/3.6	9.9/12.6	86.5/83.8	3.6/3.6	
Charcoal - Charcoal						3.6/3.6	5.0/4.8	91.4/91.6	3.6/3.6	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Certificates - ask for availability										



SERGE 600


SERGE 600

PURE BLACK

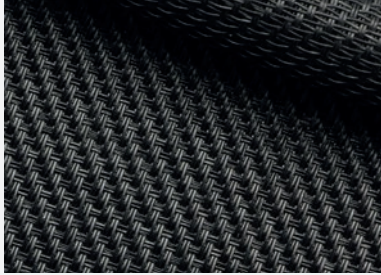

60030030

CHARCOAL - BRONZE

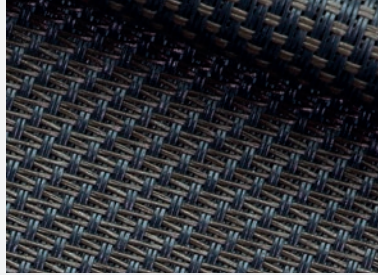


60010011

SANDSTONE



60033033

GREY - SAND

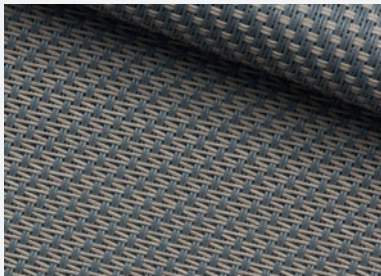


60001003

LINEN - LINEN



60008008

LINEN - WITE

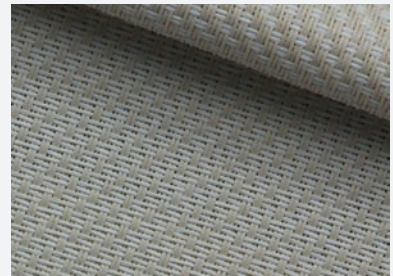

60008002


	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Pure Black	42% glasfibre + 58% pvc	525	0.74	>7	5	5.9	3.7	90.4	5.9	interior / exterior
Charcoal - Bronze						6.1	6.5/6.0	87.4/87.9	6.1	
Sandstone						7.1	20.4/20.5	72.4/72.5	6.8	
Grey - Sand						4.7	26.5/21.5	68.8/73.8	4.5	
Linen - Linen						14.9	52.5/52.7	32.5/32.4	12.9	
Linen - White						15.5	58.2/56.4	26.4/28.1	13.7	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Certificats - ask for availability										

SERGE 600



SERGE 1%

WHITE - WHITE

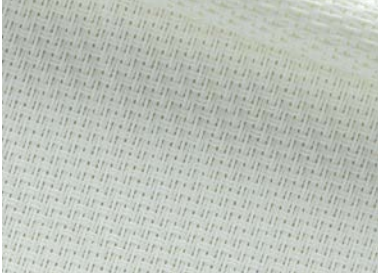


61002002

GREY - WHITE



61001002

PEARL - GREY

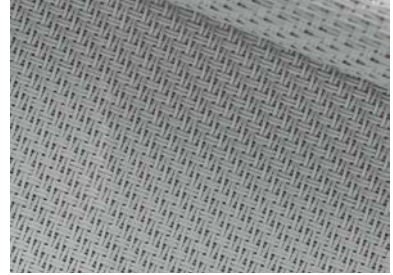

61007007

GREY - GREY



61001001

GREY - CHARCOAL



61001010

CHARCOAL - CHARCOAL



61010010

BRONZE - BRONZE




61011011

LINEN - LINEN



61008008

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	42% glasfibre + 58% pvc	638	0.78	>7	1	12.8	71.3	15.9	12.9	interior / exterior
Grey - White						2.2	44.8/31.2	53/66.6	2	
Pearl - Grey						2.8	36.9	60.3	2.1	
Grey - Grey						2.4	17.4	80.2	2.2	
Grey - Charcoal						1.2	10.5/14	88.3/84.8	1.2	
Charcoal - Charcoal						1.1	5.9	93	1.1	
Bronze - Bronze						1.4	8.6	90	1.3	
Linen - Linen						5.9	54.2	39.9	3.7	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 5.9, Weft: 6.2 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 321, Weft: 277 Certificates - ask for availability										




SERGE 1%

SERGE 600

BO LUNAR

WHITE - WHITE

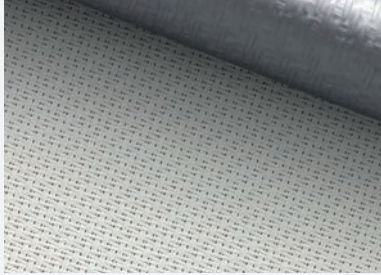

6BO002002

WHITE - PERL GREY




6BO002007

PEARL GREY - PEARL GREY




6BO007007

WHITE - GREY

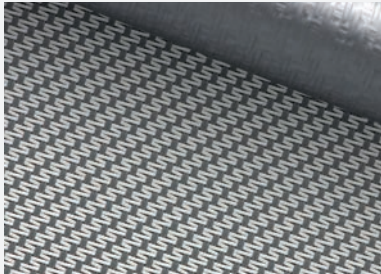


6BO001002

OYSTER SHELL

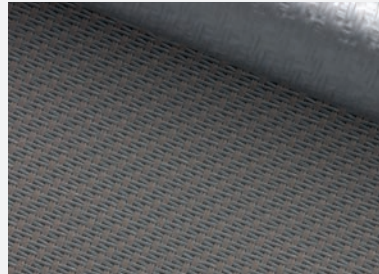


6BO033001

GREY - GREY

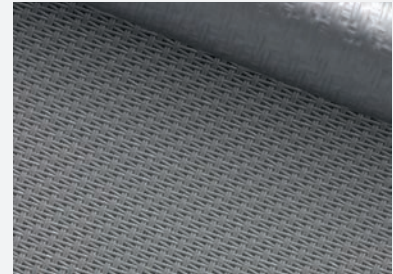

6BO001001

GREY - CHARCOAL

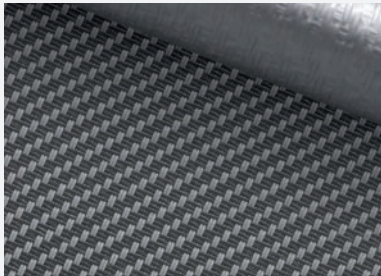

6BO001010

CHARCOAL - CHARCOAL



6BO010010


	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	33% GLASFIBRE 47% PVC 20% PVC LAMINATE	678	0.73	>7	0	0	68.8/33.7	31.2/66.3	0	interior / exterior
White - Perl Grey						0	47.8/33.2	52.2/66.8	0	
Pearl Grey - Pearl Grey						0	35.5/34	64.5/66	0	
White - Grey						0	40.3/33.7	59.7/66.3	0	
Oyster Shell						0	18.2/33.4	81.8/66.6	0	
Grey - Grey						0	17.2/33.1	82.8/66.9	0	
Grey - Charcoal						0	11/33.7	89/66.3	0	
Charcoal - Charcoal						0	6.2/33.4	93.8/66.6	0	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 9 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 224.2, Weft: 176.6 Certificates - ask for availability										

SERGE 600 BO LUNAR




POLYSCREEN® 550

ASH (EBONY - GREY)

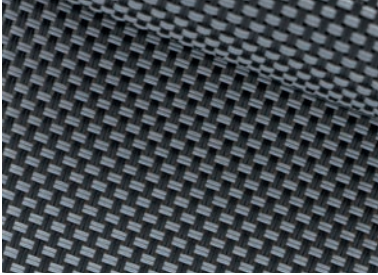

10550017

PEARL - GREY

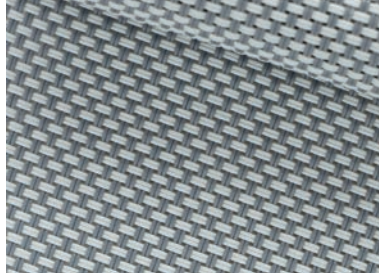


10550013

WHITE - GREY




10550012

WHITE - PEARL

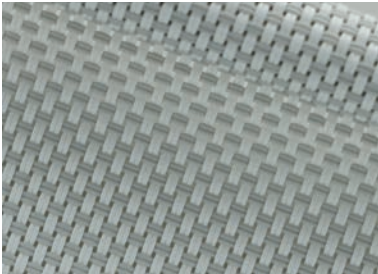


10550011

PEARL - SAND

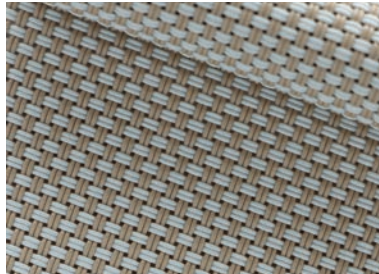

10550023

PEARL - LINEN

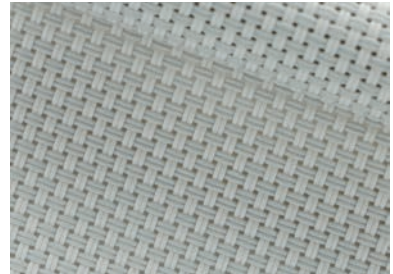

10550021

WHITE - LINEN



10550019

WHITE



10550009

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ash (Ebony - Grey)	85% PVC + 15% PES	610 ± 5%	0,78 ± 5%	8/8	5/5	5	6	7	87	6	interior / exterior
Pearl - Grey				8/8	5/5		11	29	60	9	
White - Grey				≥7/8	≥ 4/5		13	37	50	12	
White - Pearl				≥7/8	≥ 4/5		16	57	27	12	
Pearl - Sand				8/8	5/5		14	36	50	10	
Pearl - Linen				8/8	5/5		17	46	37	12	
White - Linen				≥7/8	≥ 4/5		20	63	17	16	
White				7/8	4/5		19	69	12	15	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6,6, Weft: 5,3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21%
 Certificates - ask for availability



POLYSCREEN® 550

POLYSCREEN® 550


GOLD & SILVER

EBONY - GOLD




10550051

LINEN - GOLD

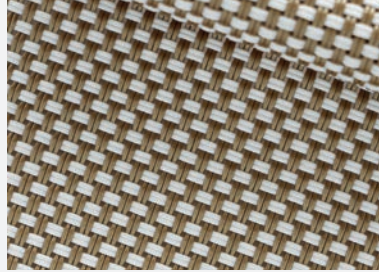


10550053

BRONZE - SILVER

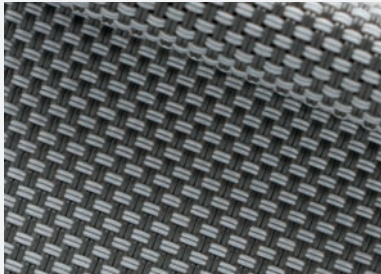

10550041

GREY - SILVER

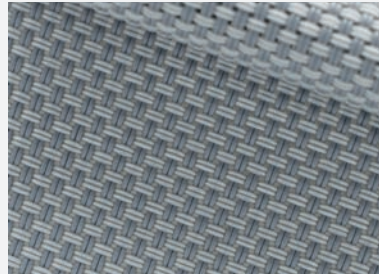

10550042

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Gold	85% PVC + 15% PES	610 ± 5%	0.78	8/8	5/5	5	11	8	81	10	interior / exterior
Linen - Gold							13	25	62	14	
Bronze - Silver							17	14	69	17	
Grey - Silver							16	17	67	17	

* On request
 Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6.6 , Weft 5.3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22 , Weft 21
 Certificates - ask for availability


POLYSCREEN® 550 GOLD & SILVER



0338


POLYSCREEN® 350

ASH (EBONY - GREY)

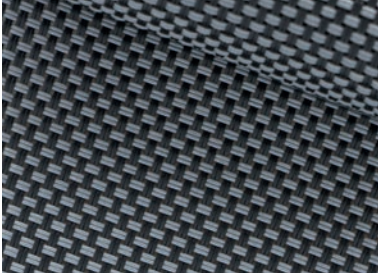

10550017

PEARL - GREY

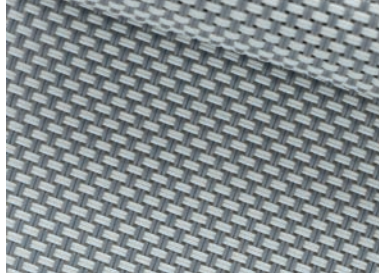

10550013

WHITE - LINEN



10350019

WHITE



10350009

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ash (Ebony - Grey)	75% PVC + 25% PES	400 ± 5%	0.53 ± 5%	8/8	5/5	10	10	8	82	10	Interior
Pearl - Grey				8/8	5/5		16	26	58	14	
White - Linen				≥7/8	≥ 4/5		27	58	15	23	
White				7/8	4/5		25	64	11	22	

Tearing resistance (daN) UNE EN ISO 13937-3:2001- Warp: 4.9, Weft: 4.7
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 153, Weft: 136
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 20%, Weft: 24%
 Certificates - ask for availability




0338

POLYSCREEN®

LUMINOUS

ARIZONA

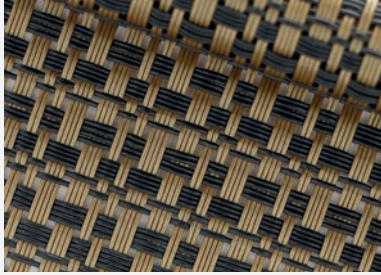


10550061

SAHARA A




10550062

SAHARA B

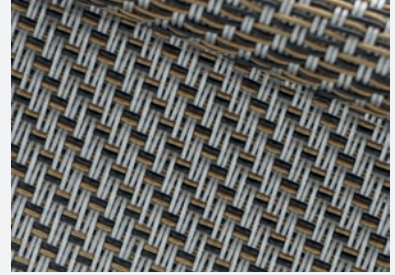


10550062

ATACAMA

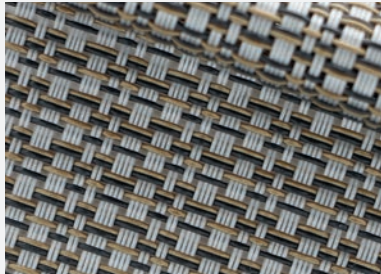

10550065

MOJAVE

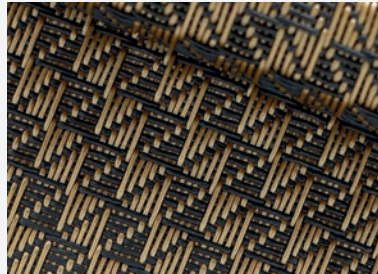

10550066


	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Arizona	PES + 15% PVC + 85% PVC	511 ± 5%	0.78	8/8	5/5	13	15	10	75	16	interior / exterior
Sahara A		612 ± 5%	0.82			6	10	15	75	11	
Sahara B		612 ± 5%	0.82			6	10	12	78	10	
Atacama		594 ± 5%	0.77			10	20	14	66	22	
Mojave		516 ± 5%	0.90			11	14	8	78	14	
Tearing resistance (daN) - On request Breaking strength (daN/5cm) - On request Stretch (%) UNE EN ISO 13934-1:1999 - On request											

POLYSCREEN® LUMINOUS

POLYSCREEN® 550


COUPAGE

COUPAGE 1

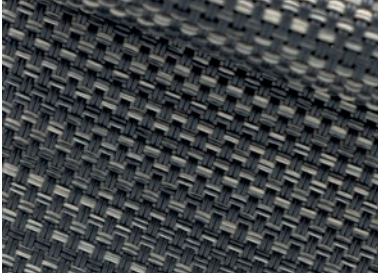


10550031

COUPAGE 2

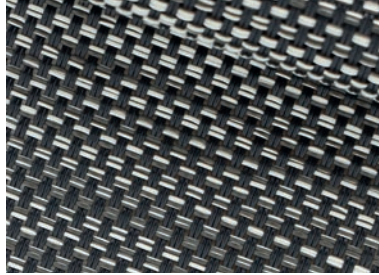


10550032

COUPAGE 3

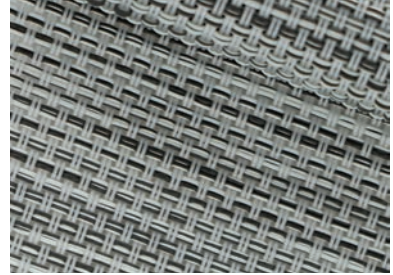

10550033

COUPAGE 4

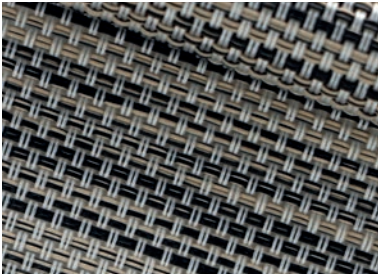

10550034

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Coupage 1	85% PVC + 15% PES	610 ± 5%	0.78	8/8	5/5	5	*	*	*	10	interior / exterior
Coupage 2							*	*	*	12	
Coupage 3							*	*	*	19	
Coupage 4							*	*	*	17	
<p>* On request Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6.6 , Weft 5.3 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133 Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22, Weft 21 Certificates - ask for availability</p>											

POLYSCREEN® 550 COUPAGE



0338

POLYSCREEN® 314


BLACK OUT

EBONY - GREY




10314B20

EBONY - LINEN

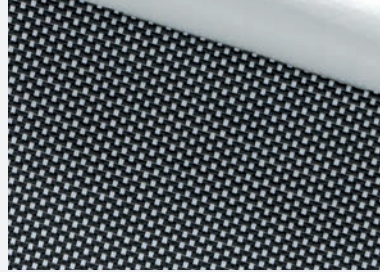


10314B08

LINEN - BRONZE

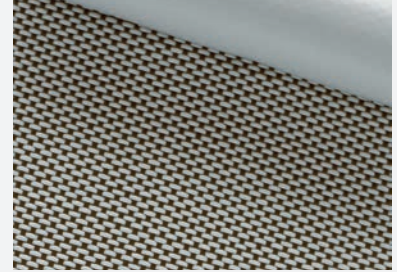


10314B06

WHITE

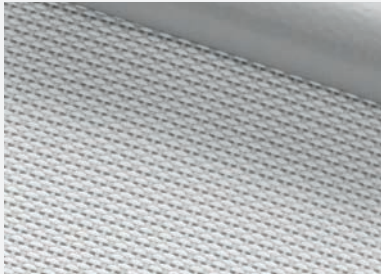


10314B02

LINEN - SAND

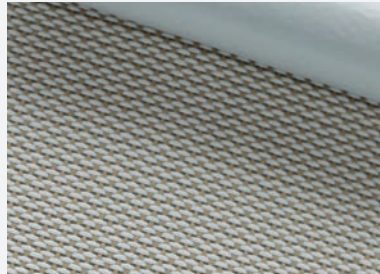

10314B04

EBONY - SAND

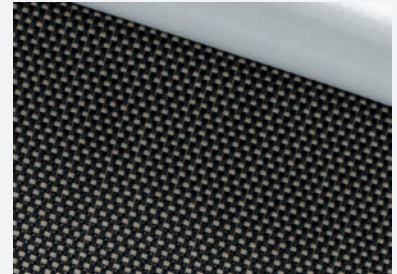

10314B10

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	EN 14501				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Grey	80% PVC + 20% PES coated with PVC	610 ± 5%	0.66 ± 5%	8 / 8	4/5	0	0	36	64	0	Interior
Ebony - Linen				8 / 8							
Linen - Bronze				8 / 8							
White				7 / 8							
Linen - Sand				8 / 8							
Ebony - Sand				8 / 8							

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4.4, Weft: 2.5
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 147, Weft: 91
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 26.7%, Weft: 17.6%
 Certificates - ask for availability


POLYSCREEN® 314 BLACK OUT



0338


SUNWORKER

WHITE

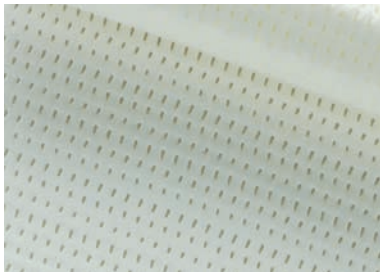

40SWK005

IRON

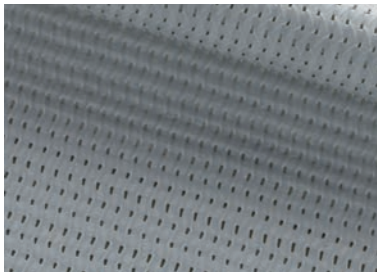

40SWK653

CHAMPAGNE



40SWK711

CHARCOAL



40SWK392


	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
							TS [%]	RS [%]	AS [%]	TV [%]	
White	Polyester / PVC	300	0.42	7/8	4-5/5	6	23	66	11	21	interior / exterior
Iron						6	12	35	53	10	
Champagne						6	21	50	29	18	
Charcoal						6	6	7	87	6	
Tearing strength (daN/5cm) DIN 53363 - Warp: 70, Weft: 35 Tensile strength (daN/5cm) NF EN ISO 13934-1 - Warp: 220, Weft: 150 Certificates - ask for availability											

SUNWORKER




SOLTIS® 92

DEEP BLACK

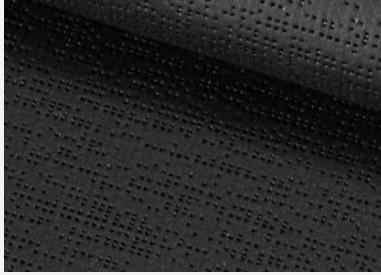

509251176

CHARCOAL

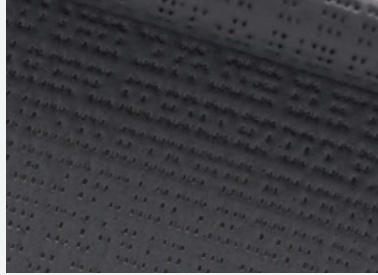


50922047

CONCRETE




50922167

SILVER

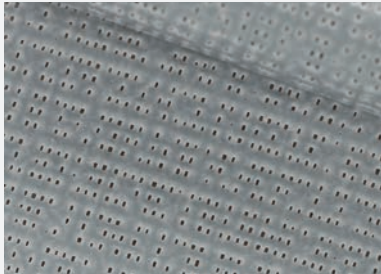

50922048

SILVER BLACK

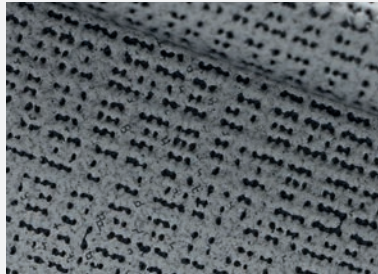

50922045

SILVER - WHITE



50922051

SANDY BEIGE



50922135

WHITE



50922044

	composition	weight [g/m ²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Deep Black	Polyester / PVC	420	0.45	5/5	4	3	5	92	3	interior / exterior
Charcoal				5/5		5	8	87	5	
Concrete				4/5		6	19	75	5	
Silver				4/5		8	46	46	8	
Silver Black				5/5		4	35	61	4	
Silver - White				4/5, 3-4/5		12/12	49/70	39/18	11/11	
Sandy Beige				5/5		11	46	43	8	
White				2/5		19	68	13	17	


Tear strength (daN) DIN 53.363 - Warp: 45, Weft: 20
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 310, Weft: 210
Certificates - ask for availability

SOLTIS® 92




SOLTIS® 99

WHITE

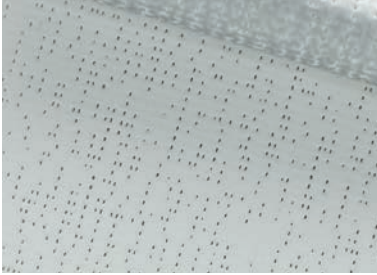

50992055

QUARTZ

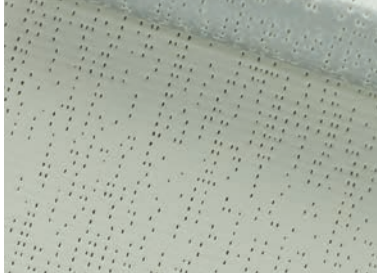


509950285

SANDY BEIGE




509950286

SPUME

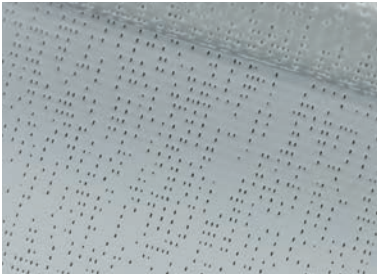


509950284

LIGHT GREY

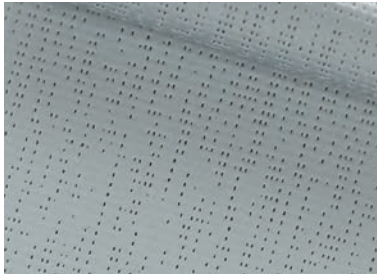

50992058

ALU

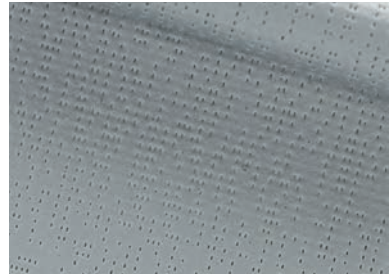

50992059

ANTRACITE



50992068

	composition	weight [g/m ²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White	Polyester / PVC	290	0.32	5/5, 3- 4/5	3	14/14	47/63	39/23	13	interior
Quartz				5/5, 5/5		11/11	47/60	42/29	9	
Sandy Beige				5/5, 5/5		10/10	43/44	47/46	7	
Spume				5/5, 4-5/5		12/12	47/60	41/28	9	
Light Grey				5/5, 5/5		8/8	44/43	48/49	6	
Alu				5/5, 5/5		6	43	51	5	
Antracite				5/5, 5/5		3/3	33/8	64/89	3	

Tear strength (daN) DIN 53.363 - Warp: 11, Weft: 13
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 160, Weft: 170
Certificates - ask for availability


SOLTIS® 99



VEROGLIM


ACOUSTIC

GREY - SILVER

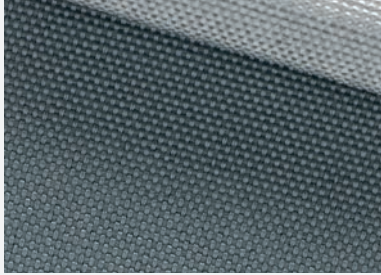


34022115

LIGHT GREY - SILVER

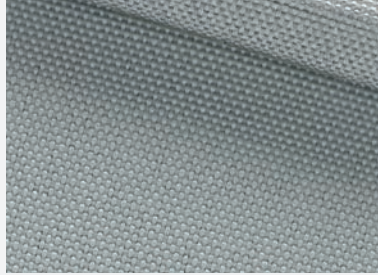


34022114

WHITE - SILVER

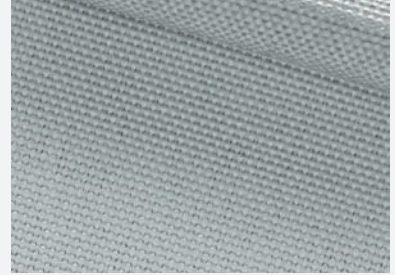

34022111

IVORY - SILVER

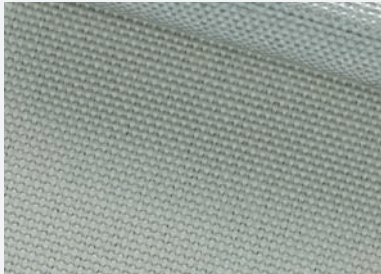

34022113

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	DIN EN 410				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Grey - Silver	Trevira CS	220	0.43	5-6/8	1	5	50	45	2	interior
Light Grey - Silver						5	52	43	4	
White - Silver						7	52	41	7	
Ivory - Silver						6	49	45	6	
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 95, Weft: 130 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 35%, Weft: 23% Certificates - ask for availability										


VEROGLIM ACOUSTIC



$\alpha_w = 60\%$



COATING FINISH

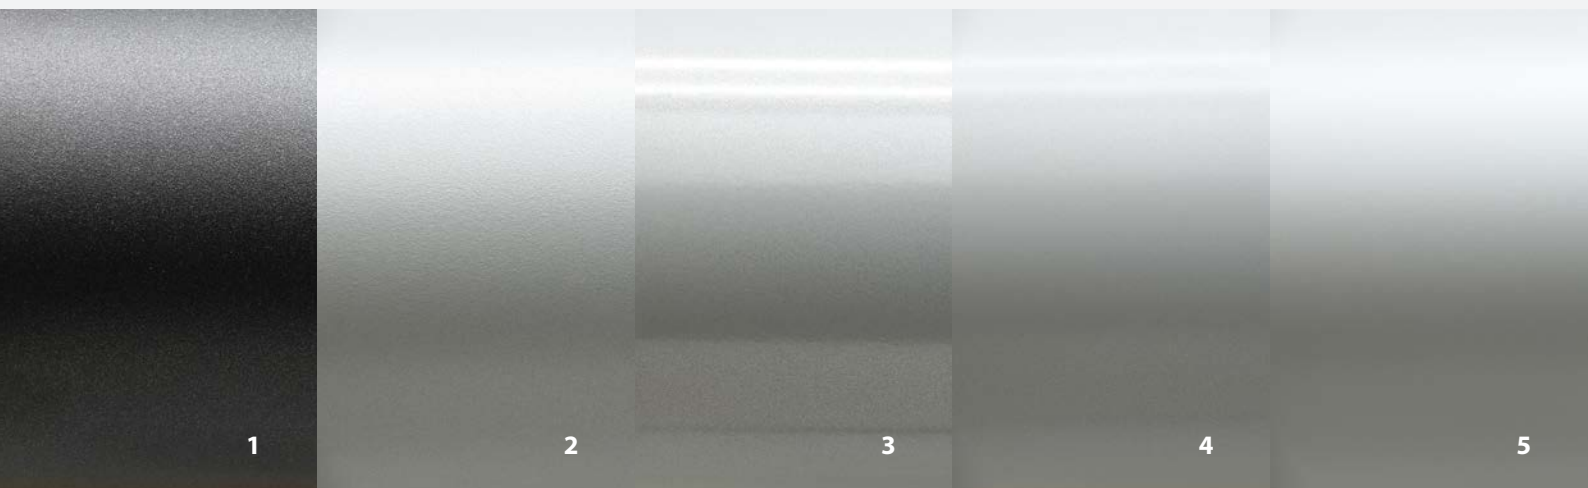

1. "fine structure - pearl mat"
2. "fine structure"
3. satin finish
4. mat finish
5. "artificial anode"

CONSTRUCTION COLOURS

Presented colour chart shows colours available within Selt collection for powder coated construction elements of Refleksols, venetian blinds and sunbreakers. Conditions of painting in colours included in the collection below and in other RAL colours – according to rules described in price lists of individual products. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint.

SLATS COLOURS


Presented colour chart shows slat colours available within SELT collection. Conditions of painting in colours within Selt collection and other RAL colours – according to rules described in price list of venetian blinds. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint. Customized perforation (layout and size of openings) and painting in colours outside of SELT collection are subject to individual arrangements in terms of price and conditions of implementation.



CONSTRUCTION

COLOURS

RAL 1013 MAT



RAL 1015 MAT



RAL 7001 MAT



RAL 7012 MAT



RAL 7015MAT



RAL 7016 MAT



RAL 7021 MAT




RAL 7022 MAT



RAL 7024 MAT




RAL 7035 MAT



RAL 7037 MAT



RAL 7039 MAT



RAL 7043 MAT



RAL 8003 MAT





RAL 8014 MAT





CONSTRUCTION

COLOURS


RAL 8016 MAT




RAL 9001 MAT




RAL 9005 MAT





RAL 9006 MAT





RAL 9007 MAT





RAL 9010 MAT




RAL 9016 MAT





DB 703 MAT



VSR 240 SATIN



VRS 780 MAT



FSM 71319 MAT

